

# HY-WAY®

## Calibration Tank


The Hy-Way® AC Calibration tank is a vertical 1,000 gallon coiled weight system. The unit is mounted on three (3) 5,000 lb. load cells which in turn are mounted on a platform. The platform scale has a remote digital indicator graduated in 5 lb. increments.

The tank is insulated with 4' of high efficiency firm fiberglass. The insulation is covered with 18 gauge embossed aluminum covered with clear acrylic to maintain its luster.

The AC Calibration tank has 20" manway on top which can be accessed via a tank mounted aluminum ladder.

Features include two (2) test weight platforms that can be folded up for travel, discharge ports, 3" butterfly valve and SOW control cable.

Available in skid-mounted or portable configurations.

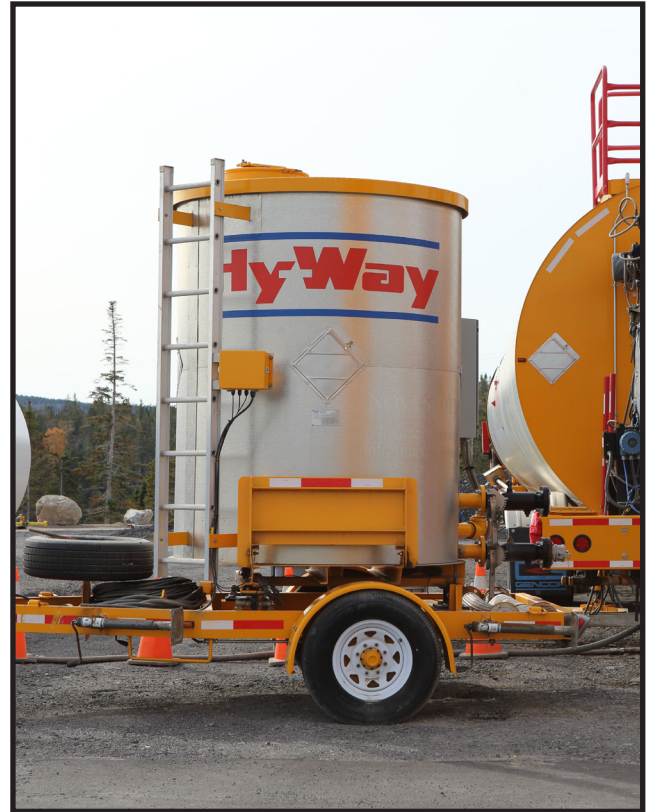

### STANDARD FEATURES

- Serpentine coil design for adequate expansion and contraction
- Four inches of high quality fiberglass insulation and powder-coated aluminum skin
- Safety suction system prevents the liquid level from dropping below the heating coil, yet allows complete emptying of the tank
- Internal vent and overflow system to prevent overfilling
- Disc Wheels
- Quick disconnect plug wiring
- Two-speed landing gear
- Crank-down landing pads
- Fifth wheel pin